

# TURBO HD DVR

## Features and Functions

### Video Input and Transmission

- Self-adaptive normal camera and Hikvision PoC camera connection
- Up to 2-ch 6 MP IP cameras input
- 5 MP/4 MP HDTV video input and live view
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTV signal, and 200m for PoC camera
- Automatic power supply management for PoC camera to guarantee safety

### Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 5 MP resolution

### Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution for DS-7208HUHI-K2/P
- Separate CVBS output

### Storage and Playback

- One SATA interface for 8ch, and two SATA interfaces for 8ch (up to 8TB capacity per HDD)
- 4/8-ch synchronous playback
- Smart search for efficient playback
- Supports third party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

### Smart Function

- Supports line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection
- VCA information overlay in live view and smart playback
- VQD (Video Quality Diagnostics)
- Supports PTZ control via Omnicast VMS of Genetec protocol

### Network & Ethernet Access


- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M self-adaptive Ethernet interface for 4ch, and 1 RJ45 10M/100M/1000M self-adaptive Ethernet interface for 8ch
- Output bandwidth limit configurable



## Specifications

Model			
Video/Audio input	<b>Video compression</b>	H.265+/H.265/H.264+/H.264	
	<b>Analog video input</b>	4-ch	8-ch
		BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	
	<b>HDTVl input</b>	5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25	
	<b>AHD input</b>	1080p25, 1080p30, 720p25, 720p30	
	<b>HDCVI input</b>	1080p25, 1080p30, 720p25, 720p30	
	<b>CVBS input</b>	PAL/NTSC	
	<b>PoC camera input</b>	Supports Hikvision PoC camera	
		<b>Note:</b> Do not unplug or plug the PoC camera if it is powered by the external power supply.	
	<b>IP video input</b>	2-ch	
Up to 6 MP resolution			
Supports H.265+/H.265/H.264+/H.264 IP cameras			
<b>Audio compression</b>	G.711u		
<b>Audio input</b>	4-ch, RCA (2.0 Vp-p, 1 KΩ)		
Video/Audio output	<b>CVBS output</b>	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
	<b>HDMI/VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	<b>VGA:</b> 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz <b>HDMI:</b> 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
		<b>Encoding resolution</b>	5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
	<b>Frame rate</b>	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)	
		Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)	
	<b>Video bit rate</b>	32 Kbps to 10 Mbps	
	<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)	
	<b>Audio bit rate</b>	64 Kbps	
	<b>Dual stream</b>	Support	
	<b>Stream type</b>	Video, Video & Audio	
Synchronous playback	4-ch	8-ch	
Network management	<b>Remote connections</b>	128	
	<b>Network protocols</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF	
Hard disk	<b>SATA</b>	1 SATA interface	2 SATA interfaces
	<b>Capacity</b>	Up to 8 TB capacity for each disk	
External interface	<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)	
	<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
		2 × USB 2.0	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0
	<b>Serial interface</b>	RS-485 (half-duplex)	
	<b>Alarm in/out</b>	4/1	8/4
General	<b>Power supply</b>	48 VDC	
	<b>Consumption (without HDD)</b>	≤ 40 W	≤ 60 W
	<b>Working temperature</b>	-10 °C to +55 °C (+14 °F to +131 °F)	
	<b>Working humidity</b>	10% to 90%	
	<b>Dimensions (W × D × H)</b>	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
<b>Weight (without HDD)</b>		≤ 1.5 kg (3.3 lb)	≤ 2 kg (4.4 lb)

## Physical Interfaces

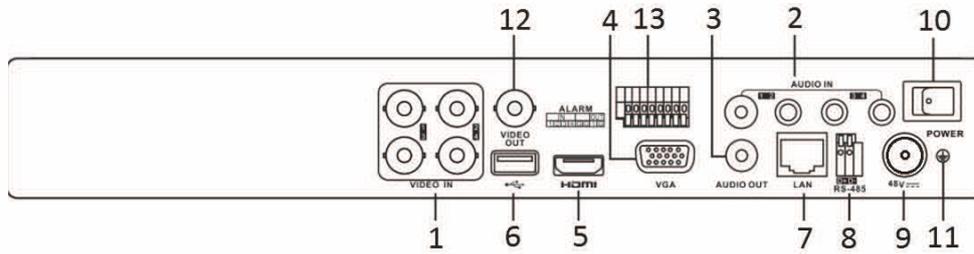

### NOTE

The rear panel of 8ch provides 8 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	48 VDC Power Input
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm In/Out
7	LAN Network Interface		